


Telecom Dry Coupling Surface Mount Transformer

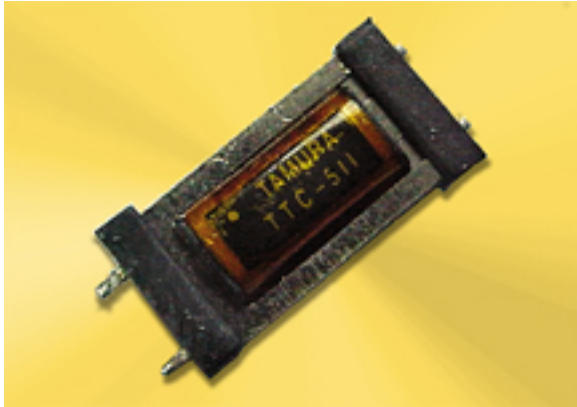

Tamura has designed and released a new Telecom Dry Coupling Surface Mount Transformer (TTC-511) that are UL 1950 3rd Edition and UL 60950 approved. TTC-511 offers a surface mount transformer with a low profile, small real estate at competitive pricing. TTC-511's insertion loss is 3.85 dB Max @ 1 kHz, longitudinal balance is 60 dB @ 200 Hz to 4 kHz. TTC-511 has a frequency response is ± 0.2 dB @ 300 Hz to 3.5 kHz.

A design engineer will find real estate solutions with TTC-511, with a max height of 4.60 mm, width of 9.90 mm and length at 20.60 mm.

Source URL (retrieved on 03/05/2015 - 9:39pm):

<http://www.wirelessdesignmag.com/product-releases/2001/08/telecom-dry-coupling-surface-mount-transformer>