


Reed Relay Switches

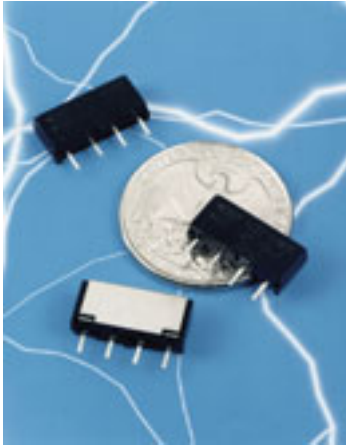

The MS series is available with up to 50 W contact rating and are capable of up to 1,000 V switching, with up to 3 AMP carry current. Featuring molded construction with an internal magnetic shield providing 10^{13} Ohms typical insulation resistance, they are offered in 5 V and 12 V versions with optional external EMI shielding. Designed for pick-and-place assembly equipment, the MS series measures 15.2 × 5.0 × 7.2 mm and have 1-Form-A (SPST) contacts.

Source URL (retrieved on 02/27/2015 - 2:51am):

<http://www.wirelessdesignmag.com/product-releases/2002/09/reed-relay-switches>